


DWG. NO.
REVISIONS

DWG

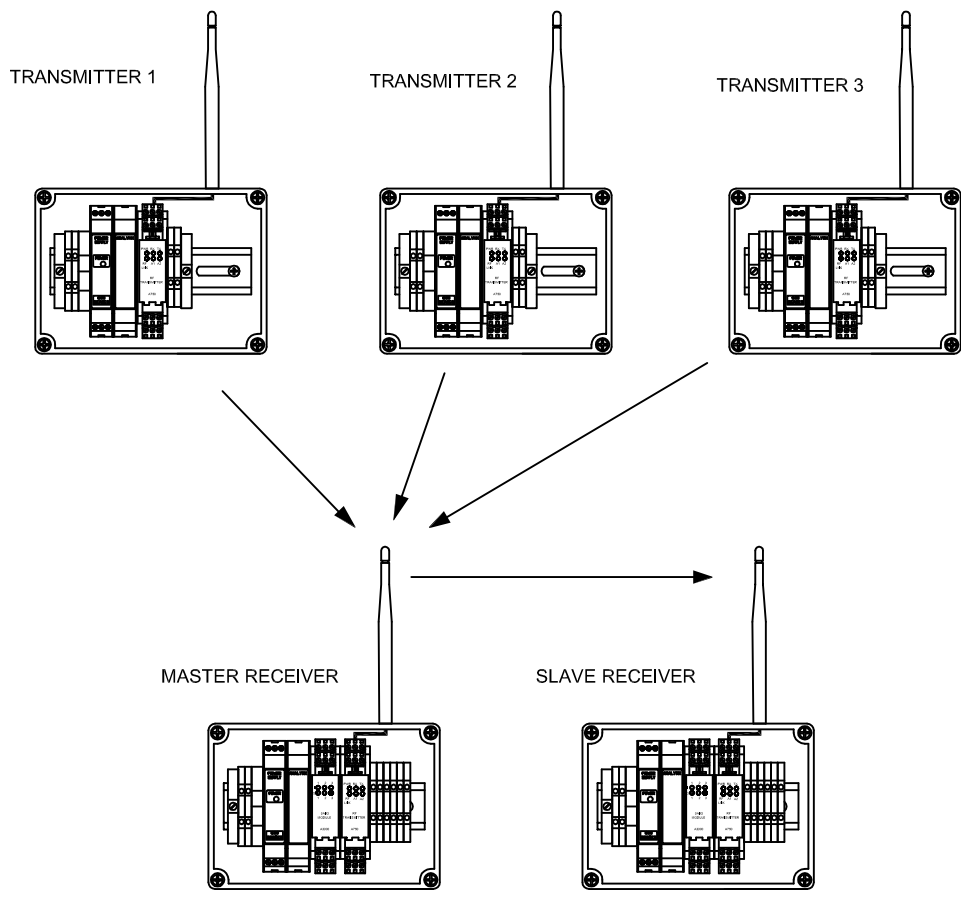

**DESCRIPTION:**

EACH TRANSMITTER (QTY 3) HAS ONE 4-20mA INPUT. EACH RECEIVER HAS THREE 4-20mA OUTPUTS. EACH DEVICE IS POWERED BY 120VAC AND IS ENCLOSED IN A NEMA 4 ENCLOSURE.

DATA IS TRANSMITTED FROM THE MASTER RECEIVER TO THE SLAVE RECEIVER.

MASTER RECEIVER AND ALL TRANSMITTERS ARE ON ONE VID. MASTER RECEIVER CHANGES VID TO SEND RF TO SLAVE RECEIVER.

QUOTE OR ORDER NUMBER <small>UNLESS NOTED, THIS QUOTE/ORDER IS FOR INFORMATION PURPOSES ONLY. QUOTE/ORDER IS NOT VALID FOR 30 DAYS.</small>			Analylnk Wireless, LLC 790 CROSS POINTE ROAD COLUMBUS, OHIO 43230		
QUOTE/ORDER NO. QUOTE/ORDER DATE QUOTE/ORDER TIME	QUOTE/ORDER BY QUOTE/ORDER FOR QUOTE/ORDER FOR	QUOTE/ORDER FOR QUOTE/ORDER FOR QUOTE/ORDER FOR	TITLE <b>MULTI IN DUAL OUT</b> FOR <b>SP3321</b>		
DRAWN CHECKED APPROVED	DATE DATE DATE	BY BY BY	NEXT ASS'Y	DWG. NO.	