


AP431 DUAL-BAND HAZARDOUS AREA ACCESS POINT ENCLOSURE FOR CISCO C9115AXE

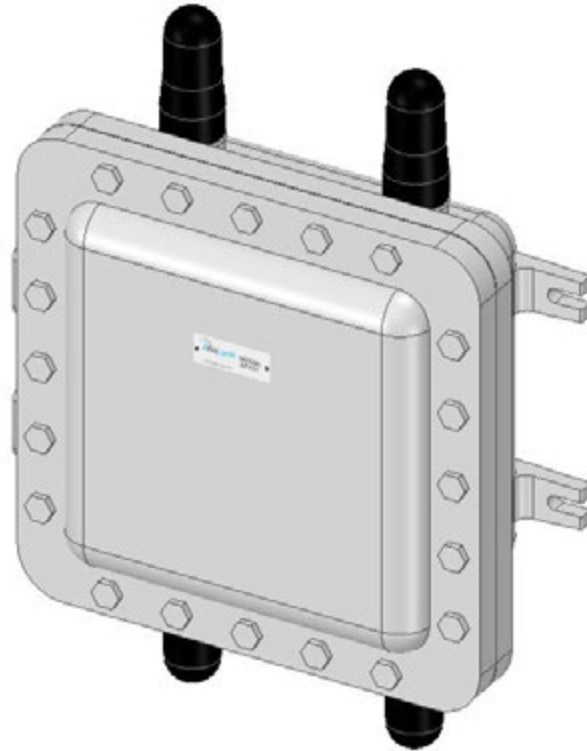

The AP431 hazardous area enclosure houses the Cisco C9115AXE dual band access point for use in the hazardous areas. The enclosure and antennas are designed for use in Class I, Division 1 group C & D areas. All hardware, mounting plate, antennas and RF cables are provided to make installation quick and easy. The enclosure utilizes our proprietary explosion proof CTX series of antennas and includes four 2.4GHz/5GHz dual band antennas. The access point is not included with the enclosure.

Ratings:

Class I, Div 1 Groups, C & D

Applications:

- Pharmaceuticals
- Oil refineries
- Oil & Gas Platforms
- Chemical Plants

Ordering information:

AP431
AP431-ATEX
AP431-N4 (NEMA 4X rating)

4

3



2

1




D

D

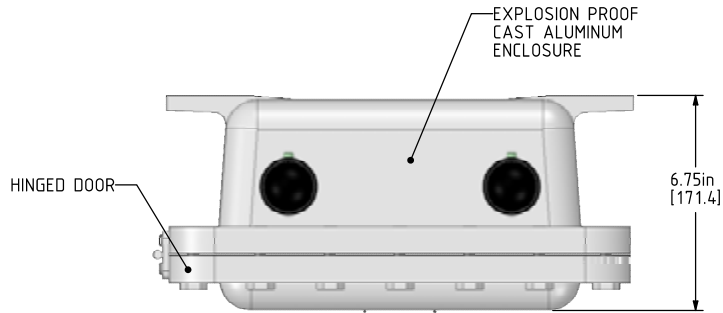


C


C

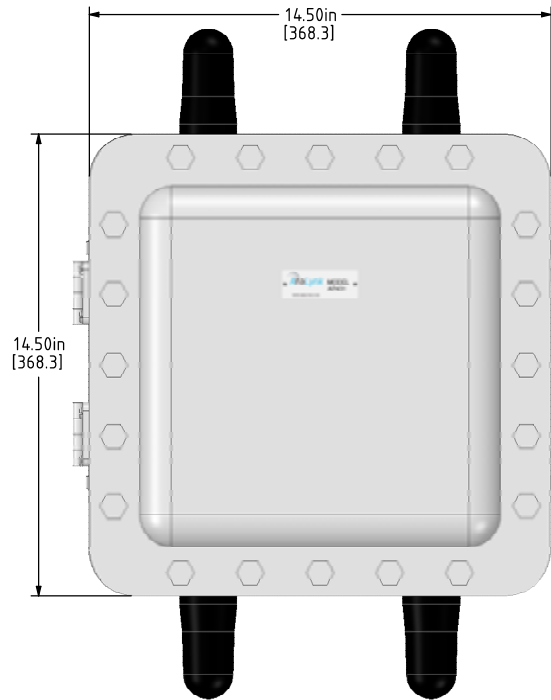

CLASS 1, DIVISION 1, GROUPS C&D, ATEX ZONE 2 ANTENNAS, DUAL BAND 2.4GHz/5GHz QTY 4

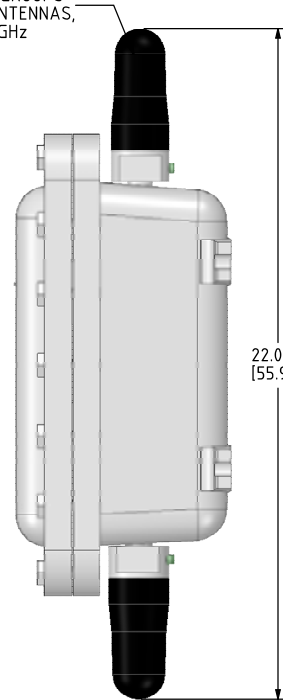


MOUNTING DIMENSIONS

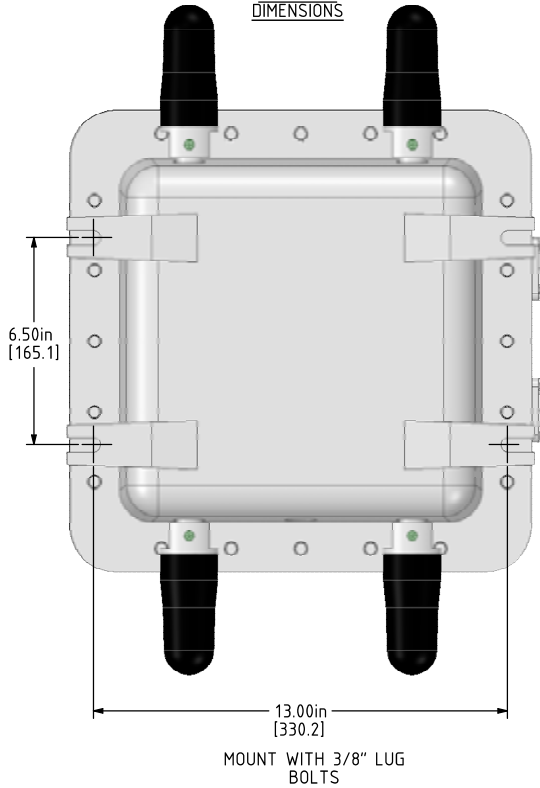

B

B

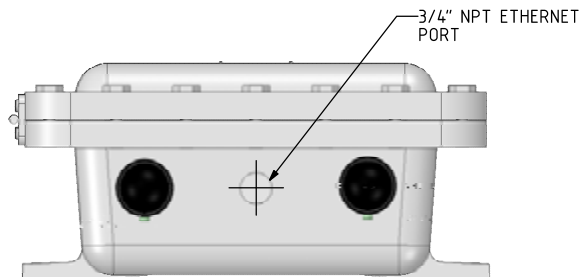

NOTES:

1. EXPLOSION PROOF ENCLOSURE WITH ANTENNAS. BOTH ENCLOSURE AND ANTENNAS ARE RATED FOR CLASS 1, DIVISION 1, GROUPS C & D, OR ATEX ZONE 1 APPLICATIONS (ATEX IS OPTIONAL).
2. INTERNAL MOUNTING FOR FORTINET CISCO C9115AXE ACCESS POINT AND FOUR ACCESS POINT TO ANTENNA RF CABLES ARE INCLUDED.
3. NEMA 4X RATING IS OPTIONAL.
4. APPROXIMATE WEIGHT WITHOUT ACCESS POINT: 44lbs, 19.96kgs.
5. ACCESS POINT, NOT INCLUDED.
6. DIMENSIONS: INCHES[cm].

A

A

4

3

2

1



ANALYnk WIRELESS, LLC 790 CROSS POINTE ROAD, COLUMBUS, OHIO 43230, U.S.A.			
DESCRIPTION			
AP431 FOR CISCO C9115AXE			
SIZE	CAGE CODE	DWG NO.	REV
C		SD-C-0413	A
SCALE	www.analynk.com		SHEET