

AP436 DUAL-BAND HAZARDOUS AREA ACCESS POINT ENCLOSURE FOR THE CISCO C9124AXE

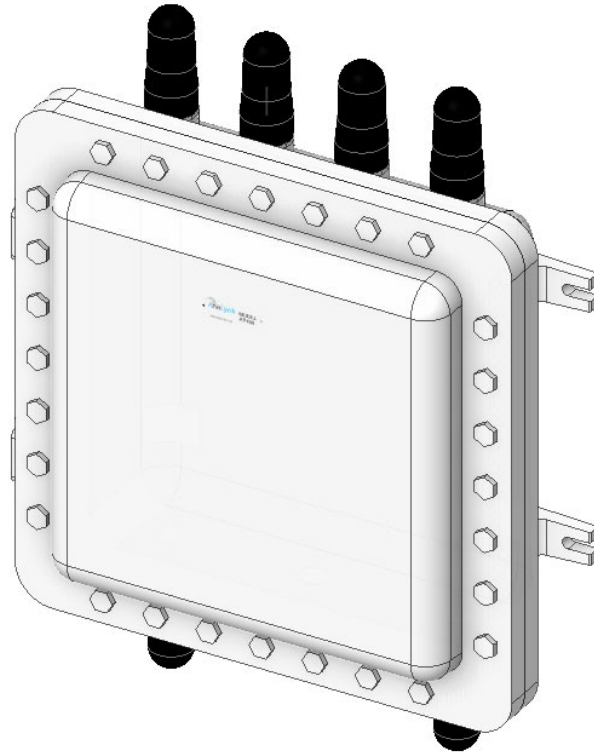

The AP436 is designed to house the Cisco C9124AXE dual band access point for use in hazardous areas. The enclosure, all hardware and antennas are rated for Class I, Div 1, groups C & D Hazardous Locations. All hardware, mounting plate, antennas and RF cables are provided to make installation of the access point quick and easy. The enclosure utilizes six of our proprietary 2.4GHz/5GHz dual band explosion proof antennas. The access point is not included.

Ratings:


Class I, Div 1 Groups, C & D

Applications:


- Pharmaceuticals
- Oil refineries
- Oil & Gas Platforms
- Chemical Plants

Ordering information:



AP436
AP436 -N4 (NEMA 4 option)

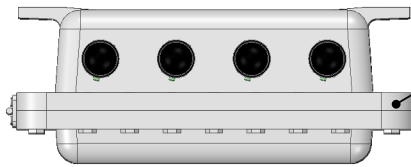


HAZLOC CAST ALUMINUM ENCLOSURE SEE NOTE 1

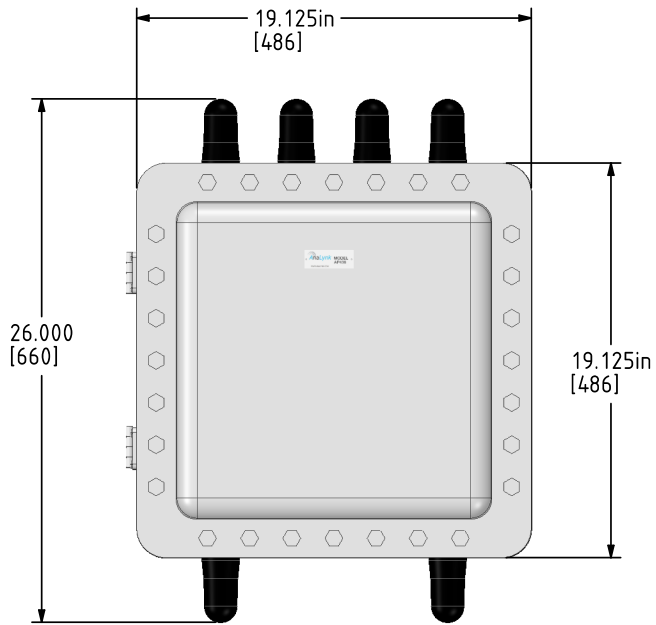

HAZLOC ANTENNAS, QTY 1, SEE NOTE 1

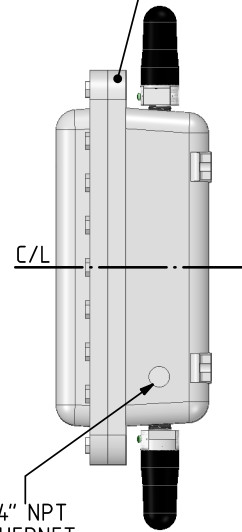


MOUNTING DIMENSIONS

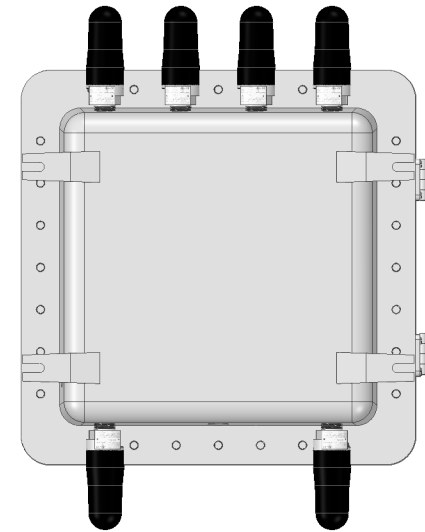

MOUNT WITH 1/2" LUG BOLTS

NOTES:

1. EXPLOSION PROOF ENCLOSURE WITH ANTENNAS. BOTH ENCLOSURE AND ANTENNAS ARE RATED FOR CLASS 1, DIVISION 1, GROUPS, C & D.
2. INCLUDES INTERNAL MOUNTING FOR CISCO C9124AXE ACCESS POINT AND SIX ACCESS POINT TO ANTENNA RF CABLES.
3. NEMA 4X RATING IS OPTIONAL.
4. APPROXIMATE WEIGHT WITHOUT ACCESS POINT: 95lbs., 43kgs.
5. ACCESS POINT, NOT INCLUDED.
6. DIMENSIONS: INCHES [mm].

 AnaLynk WIRELESS, LLC 790 CROSS POINTE ROAD, COLUMBUS, OHIO 43230, U.S.A.			
DESCRIPTION			
AP436 FOR CISCO C9124AXE			
SIZE	CAGE CODE	DWG NO.	REV
B		SD-B-0424A	A
SCALE	1:6	www.analynk.com	SHEET